


## Serie 3O - Euro-profile - 3O3O

Standard 3030 profile with 8mm slot. The profile is produced in EU. Compatible with our 3030 accessories.

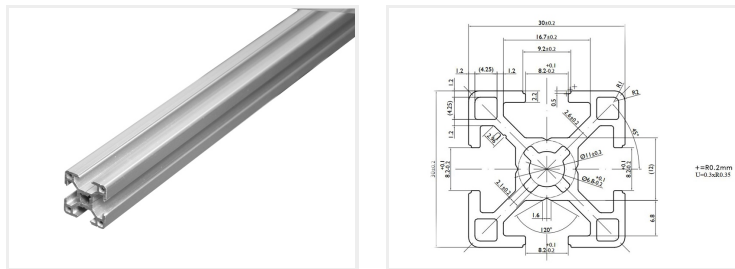

Standard 3030 profile with 8mm slot. The profile is produced in EU.

The dimensions on the profile and track makes it compatible with all of our 3030 accessories.

The 6.8mm cross center makes it easy to cut M8 threads, as there are space for chips.

Buy online at:

[www.matronics.eu/A300080-1](http://www.matronics.eu/A300080-1)

### Specifications

Alloy	EN-AW 6063 T66
Anodizing	10-15 $\mu\text{m}$
Moment of inertia	LX 2,68cm <sup>4</sup> - LY 2,68cm <sup>4</sup>
Section of modulus	Zx 1,787cm <sup>3</sup> - Zy 1,787cm <sup>3</sup>
Weight	0,84 kg/m



#### 100cm

SKU A300080-1

Dimensions: 30 x 1000 x 30mm



#### 200cm

SKU A300080-2

Dimensions: 30 x 2000 x 30mm



#### 302cm

SKU A300080-3

Dimensions: 30 x 3020 x 30mm

## A close-up photograph of a silver-colored metal extrusion profile. The profile has a complex, multi-chambered cross-section with several internal ribs and a T-shaped top flange. It is shown at an angle, highlighting its length and the precision of its manufacturing.

