


## Prostroke - HA5 hideaway

Oval, bright and compact LED warning strobe, that can be surface mounted on car, MC and truck. Mounted with 2 bolts. UNECE R65 approved.

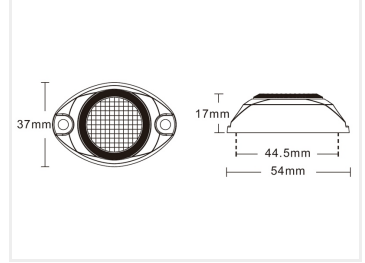

Hideaway type 4 - Bright and compact LED warning strobe lamp, that can be connected to both 12V and 24V, and can be surface mounted on car, MC and truck. The compact oval housing has 4 powerful 3W LEDs, and they create a bright warning together with the special lens, regardless of placement. The LED lamp is made of aluminum, which makes them very robust against harsh weighing conditions.

The LED lamp is easily mounted with its 2 included bolts (44,5mm distance).

The controller has 21 programs, where it is possible to switch between 21 different programs that can be synchronized with other connected Prostroke LED lamps.

The LED lamp is ECE R65-approved, and can legally be used throughout Europe and be used on public roads and highways.

You can find further information under downloads, where you can download our datasheet o the product, which has more information regarding the different blink patterns / programs.

The single model has one emitter only. There is a 180cm wire mounted to the lamp, that is also potted which makes it 100% waterproof.

## Connection

The strobelight connected quite easily as shown below.

- White = Constantly to black / minus to activate low intensity.
- Red = Plus warning light (12V-24V)
- Black = Minus
- Yellow = Blink pattern / programs at minus and synchronization between other Prostroke units

## Blink pattern

When you pulse the yellow wire on black (minus) for less than 1 second, you switch between the 21 different flash patterns / programs.

In pulse between 3-5 seconds, you switch to the previous flash pattern / program.


If the pulse between 6-9 seconds, you go back to preset / flash pattern / program 1. As for the minus and synchronization between other Prostroke units, you will have to connect the yellow wire together.

Buy online at:

[www.matronics.eu/731105A](http://www.matronics.eu/731105A)

## Specifications

Voltage	12V - 24V
Temperature	-30 to 60 grader
Certificates	R65 R10 (EMC)
Flash patterns	26
LEDs	4 x 3W/5W



### **Yellow, Single**

SKU 731105A

Dimensions: 17 x 37 x 54mm

Product pictures

