


Multi-function Timer, DIN - AC/DC 12V - 240V

A timer relay from 12V to 230V with 10 different functions that can be used for time-control and automatics. Time-interval from 0.1s to 10 days.

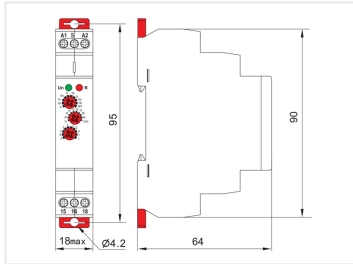

A compact timer with 10 different functions that can be used for time-control and automatics. The time interval can be set from 0.1 seconds up to 10 days. Multiple controllers and relays can be connected for making advanced automated controls.

The timer is connected from 12V to 230V, and the relay can be used for up to 250V in AC or up to 24V in DC. Max current is 16A.

The relay fits on a standard DIN-rail (EN 60715).

There is a green LED to show if the timer has power and a red LED to show if the relay is activated.

Functions:

Below are the different functions, the full description can be found in the datasheet.

- A: On delay
- B: Interval (off delay)
- C: Repeat cycle (starting on)
- D: Repeat cycle (starting off)
- E: Off delay
- F: Single shot
- G: Single shot trailing edge
- H: On/off delay
- I: Latching relay
- J: Pulse generator

Buy online at:

www.matronics.eu/612000

Specifications

Powersupply	12V - 240V AC and DC
Max current	16A
Max relay voltage	250VAC / 24VDC
Mounting	DIN rail (EN60715)
Mechanical lifetime	1 x 10 ⁷
Electrical lifetime	1 x 10 ⁶
Output	SPDT



1 polet (SPDT)
SKU 612000



2 poles (DPDT)
SKU 612005

Technical drawing of the 12V 10Ah battery showing front and side views with dimensions.

Front View (Left):

- Top terminals: A1, S, A2
- Terminal S is connected to a fuse.
- Un (Unlabeled), R (Red), and G (Green) indicators.
- Three red circular warning symbols with 'X' marks and text: "100% 100% 100%".
- Bottom terminals: 15, 16, 18
- Bottom terminal 18 is connected to a red terminal block.
- Dimension: 95 (height)
- Dimension: 18max (terminal height)
- Dimension: Ø4.2 (terminal diameter)

Side View (Right):

- Dimension: 90 (height)
- Dimension: 64 (width)