


M8 bolt with countersunk unbrako head

Countersunk bolt for mounting in countersunk holes. Used when you want a flat mounting surface.

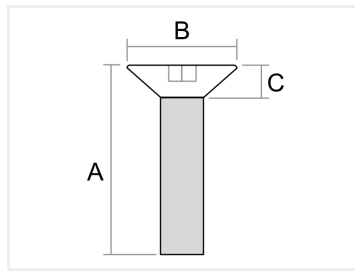

Countersunk bolt for mounting in countersunk holes. Used when you want a flat mounting surface.

The length of countersunk is the total length including the head.

Buy online at:

www.matronics.eu/A008316

Specifications

Head diameter 15,4mm

Head height 5mm



16mm

SKU A008316

Dimensions: mm



20mm

SKU A008320

Dimensions: mm



25mm

SKU A008325

Dimensions: mm



40mm

SKU A008340

Dimensions: mm

Product pictures

