


Wireless Relay System - 8 channel

Remote controlled contoller, with 8 relays, that can be controlled individually with the remote.

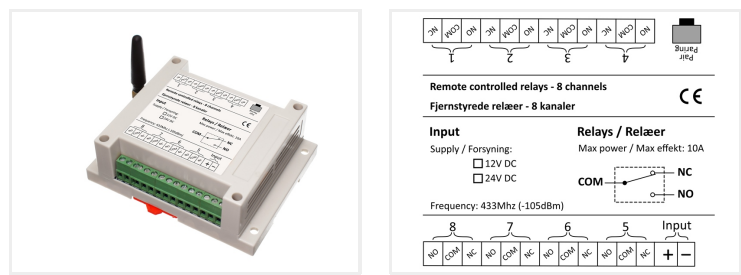

Remote controlled controller, with 8 relays, that can be controlled individually with the remote. It has several advanced functions, that makes it usable for many purposes.

Buy online at:

www.matronics.eu/609748

Remotes sold seperatly

The setup is done from the remote, when this is paired with the controller. The pairing is started by pushing the "pair" button on the controller, where after you push one of the buttons on the remote. The number you push on the remote is equivalent to the wanted setup. You can see a list of the setups below.

Connecting to power supply

The relay is supplied with 12V or 24V, while the relays themselves can switch on and off 230V circuits as well. If you want to use it for 230V you need to use a 230V to 12V or 24V transformer, eg. a 15W. You connect the supply to the screw terminals marked as "Input" on the diagram.

Connecting to the relays

There is no connection between the controller and the relays, you will have to connect power to each individual relay yourself. Typically you will connect power to COM, and connect the device to be powered to NO (normally open). When the relay is activated, it connects COM and NO, so that the connected device is powered on. NC is normally closed, so it is connected to COM until the relay is activated.

Functions

Knap Function

- 1: All momentary (horn)
- 2: Change between one active relay
- 3: Individual On/off (push for on, push for off)
- 4: Relæ 1-6: Momentary (horn)

Relæ 7-12: Individual On/off (push for on, push for off)
- 5: Relæ 1-6: Momentary (horn)

Relæ 7-12: Change between one active relay
- 6: Relæ 1-6: Change between one active relay

Relæ 7-12: Individual On/off (push for on, push for off)
- 7: Relæ 1-4: Momentary (horn)

Relæ 5-8: Change between one active relay
- 8: Relæ 9-12: Individual On/off (push for on, push for off)
Relæ 1-6: Individual On/off (push for on, push for off)

Relæ 7-12: Momentary (horn)



Relay, 12V
SKU 609748



Relay, 24V
SKU 609768



Remote, 8 Buttons
SKU 609728

Product pictures



NC	COM	NO	NC	COM	NO	NC	COM	NO	NC	COM	NO
1			2			3			4		

Pairing

Remote controlled relays - 8 channels

Fjernstyrede relæer - 8 kanaler

CE

Input

Supply / Forsyning:

☐ 12V DC

☐ 24V DC

Frequency: 433Mhz (-105dBm)

Relays / Relæer

Max power / Max effekt: 10A

COM

NC

NO

8			7			6			5			Input	
NO	COM	NC	NO	COM	NC	NO	COM	NC	NO	COM	NC	+	-