

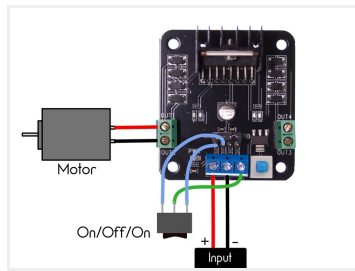


Motor controller, dual H-bridge L298, 7-24V DC, 2A

Simple and effective motor controller for 1 or 2 DC motors. Simple control of the direction of the motor.

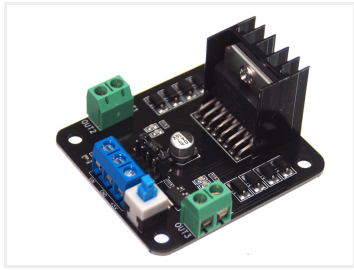

Simple and effective motor controller for 1 or 2 DC motors, with a voltage up to 24V, and max current of 2A. each channel. (Total 4A)

Buy online at:

www.matronics.eu/609818

There are 4 pins on the board to get motor 1 or 2 to turn one or the other way.

When there are no inputs the motor simply stops. This allows you to easily connect a switch, microcontroller or other devices to control the motor.

There is a breaker to shut off the controller and motors.


Connection and use

Supply is connected to Vin and GND

Motor 1 is connected to OUT1 and OUT2, while motor 2 is connected to OUT3 and OUT4.

The "5V" screw terminal is a output from the controllers own 5V supply. You should not connect any supply to this.

The control-pins may only be connected with 5V. You will typically use the 5V in the screw terminal to connect the pins. More than 5V will ruin the controller.



Motor controller, dual H-bridge L298, 7-24V




DC, 2A

SKU 609818

Mountinghole: 3mm

Dimensions: 27 x 54 x 44mm

Product pictures

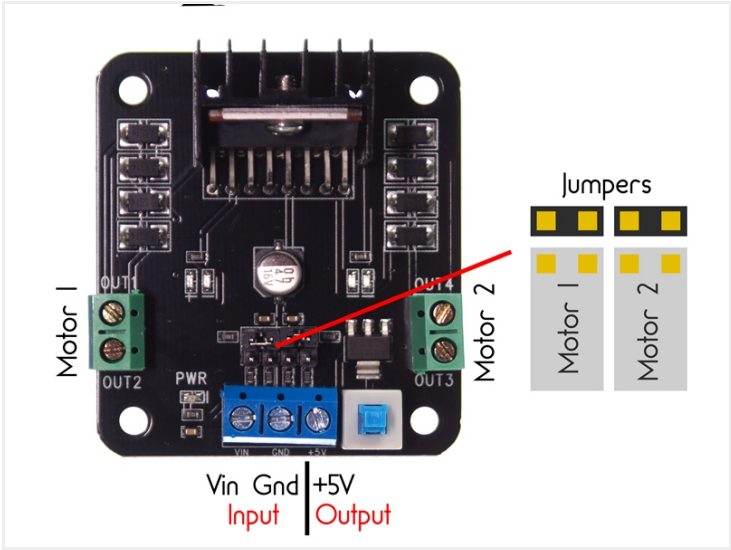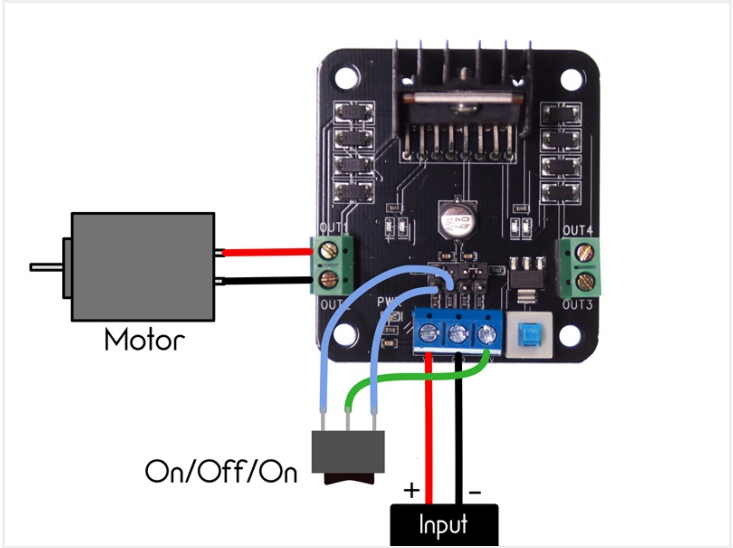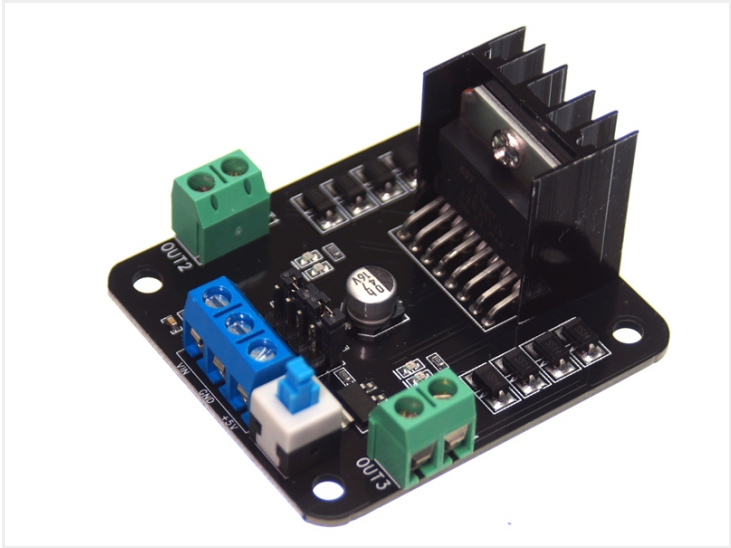

Jumpers	
Motor 1	Motor 2

Vin	Gnd	+5V
Input		Output